

tvcabo

**MANUAL
DE UTILIZADOR**

ONU HUAWEI
HG8247
HG8247H

IMAGENS



ONU HUAWEI
HG8247




ONU HUAWEI
HG8247H

CONFIGURAÇÃO DO NOME E DA REDE WIRELESS E RESPECTIVA PASSWORD DE ACESSO

É possível alterar o nome e a password de acesso à rede Wireless por duas vias:

- Via Wireless
- Ligação por cabo

Em ambos os casos, dever-se-á aceder às configurações da ONU pelo endereço <http://192.168.100.1> e em seguida clicar ENTER;



Abrir-se-á em seguida uma caixa de autenticação a solicitar *user name* que é **root** e *password* que é **admin**. Em seguida clicar ENTER.



Abrir-se-á a página de configuração da Onu, com várias opções. Deverá ser seleccionada a opção WLAN.



As ONUs após ficarem registadas, vão ficar com o nome da rede: **TVCABO-WIFI** e *password* da rede **wifitvcabo**;

HG8247 Logout

HUAWEI Status WAN LAN WLAN Security Forward Rules Network Application System Tools

WLAN Configuration WLAN > WLAN Configuration

On this page, you can set the WLAN parameters, including the WLAN switch, SSID configuration and channel selection.

☒ **Enable WLAN**

Basic Configuration New Delete

SSID Index	SSID Name	SSID State	Associated Device Number	Broadcast SSID	Security Configuration
1	Pinto	Enable	32	Enable	Configured

SSID Configuration in Detail

SSID Name:

Enable SSID: ☒

Associated Device Number:

Broadcast SSID: ☒

WMM Enable: ☒

Authentication Mode:

Encryption Mode:

WPA PreSharedKey: *(8-63 ASCII characters or 64 hexadecimal digits)

WPA Group Rekey Interval: *s (600-86400)

WPS Enable: ☒

WPS Mode:

Advance Configuration

Transmitting Power:

Regulatory Domain:

Channel:

Channel Width:

Mode:

DTIM Period: (1-255, default: 1)

Beacon Period: ms (20-1000ms, default: 100)

RTS Threshold: bytes (1-2346 bytes, default: 2346)


Frag Threshold: bytes (256-2346 bytes, default: 2346)

Copyright © Huawei Technologies Co., Ltd. 2009-2012. All rights reserved.

Para alterar o *username*, utilizar a opção SSID NAME e inserir o nome que se pretende para a rede;

Na opção WPA PRE-SHAREDKEY, deverá inserir-se a *password* para a rede (tem de ser por 8 ou mais caracteres);


Mais abaixo, em authenticationMode, seleccione com um clique a opção WPA/WPA2 Pre-sharedkey.

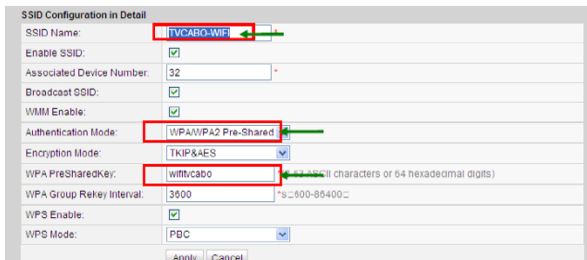

SSID Configuration in Detail

SSID Name:	TVCABO-WIFI	←
Enable SSID:	☒	
Associated Device Number:	32	*
Broadcast SSID:	☒	
WMM Enable:	☒	
Authentication Mode:	WPA/WPA2 Pre-Shared	←
Encryption Mode:	TKIP&AES	
WPA PreSharedKey:	wlftvcabo	← (8-63 ASCII characters or 64 hexadecimal digits)
WPA Group Rekey Interval:	3600	*s=600-86400
WPS Enable:	☒	
WPS Mode:	PBC	

Apply Cancel

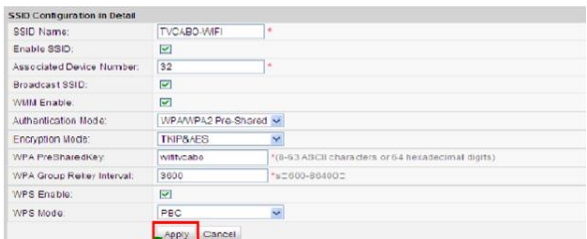

SSID Configuration in Detail

SSID Name:	TVCABO-WIFI	*
Enable SSID:	☒	
Associated Device Number:	32	*
Broadcast SSID:	☒	
WMM Enable:	☒	
Authentication Mode:	WPA/WPA2 Pre-Shared	
Encryption Mode:	TKIP&AES	
WPA PreSharedKey:	wlftvcabo	*(8-63 ASCII characters or 64 hexadecimal digits)
WPA Group Rekey Interval:	3600	*s=600-86400
WPS Enable:	☒	
WPS Mode:	PBC	

Apply Cancel

tv cabo

202512_ONU HUAWEI HG8247 & HG8247H

